



Revolutionary GNSS Wideband Antenna Delivers Enhanced Accuracy and Performance

Benefits

High precision measurements

More signal observations ensure higher performance

Eliminates need to upgrade as future GNSS signals become available

Withstands harsh environments

Features

Stable phase centre

Ultra-wideband Dorne-Margolin element

Aluminum alloy construction

Tracks signals when visible, down to the horizon and below

Supports GPS, GLONASS, Galileo and Compass

NovAtel's multi-constellation GNSS-750 antenna delivers next generation choke ring technology, ensuring functionality with existing and planned satellite constellations. Its robust, low profile construction makes it ideal for reference stations, geological monitoring and other applications requiring a robust high performance antenna.

Superior Performance and Accuracy

The innovative design of this 3D antenna not only improves low-elevation tracking, it provides superior multi-path mitigation, delivering enhanced performance and positioning accuracy. An insert to the choke ring was also added to the design to further enhance multipath rejection based on results from live GIOVE-A, GIOVE-B and L5 signals.

Proven Robust Technology

Utilizing an ultra-wideband Dorne-Margolin antenna element, the GNSS-750 optimizes antenna gain enabling use with most manufacturers' geodetic receivers. Its sturdy aluminum alloy construction ensures it can withstand the most difficult environmental conditions.

If you require more information about our antennas, visit novatel.com/products/antennas.htm



novatel.com

sales@novatel.com

1-800-NOVATEL (U.S. and Canada)
or 403-295-4900

Europe 44-1993-85-24-36

SE Asia and Australia 61-400-833-601

Performance

Signals Tracked

GPS	L1, L2, L2C, L5
GLONASS	L1, L2, L3
Galileo	E1, E5a, E5b, E6, AltBOC
Compass	B1, B2, B3
L-band	(including OmniSTAR and CDGPS)

3 dB Pass Band

L1	1568.5±55 MHz (typical)
L2	1232±80 MHz (typical)

Out-of-Band Rejection

L1 ($f_c=1568.5$ MHz)	
$f_c \pm 100$ MHz	30 dBc (typical)
$f_c \pm 150$ MHz	50 dBc (typical)
L2 ($f_c=1232.5$ MHz)	
$f_c + 150$ MHz	30 dBc (typical)
$f_c - 150$ MHz	50 dBc (typical)
$f_c \pm 100$ MHz	30 dBc (typical)
Other Bands	
$f < 900$ MHz	80 dBc (typical)
$f > 150$ MHz	80 dBc (typical)

LNA Gain 43 dB (typical)

Gain at Zenith (90°)

L1/E1/B1	+5.0 dBic (minimum)
L2 /L5/E5	+5.0 dBic (minimum)
B2/B3/E6	+5.0 dBic (minimum)

Noise Figure 2.0 dB (typical)

VSWR 1.5 : 1

Phase Centre Offset <2 mm¹

Altitude IEC-68-2-13
(-400 to +10,400 m)

Physical and Electrical

Dimensions 380 mm diameter
x 200 mm

Weight 7.6 kg

Power

Input Voltage	+3.3 to +12.0 VDC
Power Consumption	100 mA (typical)

Nominal Impedance 50 ohms

Connector N-type with
TNC adapter supplied

Environmental

Temperature

Operating	-55° C to +85° C
Storage	-55° C to +90° C

Humidity ISO-9022-13-06
100% non-condensing

Solar Radiation IEC-68-2-5

Resistance to Corrosion IEC-60950-22

Water Ingress IEC-60529 1PX6, 1PX7

Dust Ingress IEC-605929 1P6X

Salt Fog IEC-68-2-11

Sinusoidal Vibration (operating)
ISO 9022-3 Method 36




Shock MIL-STD-810F, 516.5

RoHS EU Directive 2002/95/EC

Compliance FCC, CE

Elevation Gain Patterns

The plots below represent the typical right-hand circular polarized (RHCP) and left-hand circular polarized (LHCP) normalized radiation patterns for all GNSS frequencies.

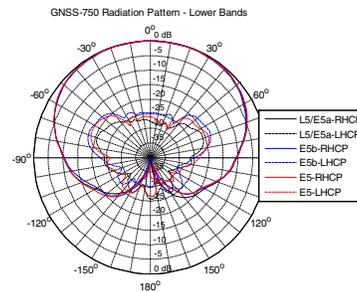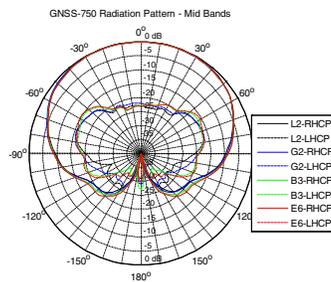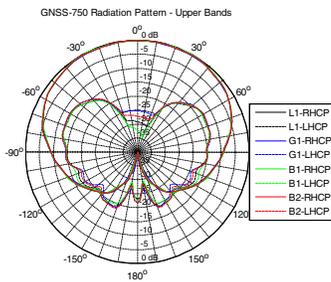

Version 2 - Specifications subject to change without notice.

© 2009 NovAtel Inc. All rights reserved.

NovAtel is a registered trademark of NovAtel Inc.

Printed in Canada. D13333

GNSS-750 September 2009

For the most recent details of this product:

novatel.com/Documents/Papers/GNSS-750.pdf

¹ Phase centre offsets and phase centre variations are less than 2 mm at any GNSS frequency using NovAtel anechoic chamber results. Geott calibration data will be available soon.

