

L1/L2 Antennas

Features

Choice of specialized antennas

Wide input voltage range

Rugged, environmentally sealed housings

Benefits

Offers performance and a form factor optimized to meet the needs of your application

Ensures compatibility with virtually all GPS receivers

Provides reliability in a wide range of severe environments and applications



NovAtel's L1/L2 antennas combine exceptional performance with unsurpassed reliability to suit a wide variety of applications.

GPS-702

The GPS-702 includes patented Pinwheel™ technology to provide superior multipath rejection in a compact and lightweight dual-frequency antenna. With a highly stable phase center in the same location for the L1 and L2 signals, the antenna is the perfect choice for high precision applications. The GPS-702 is waterproof to IEC 60529 IPX7 and meets the MIL-STD-810F specification for vibration and salt spray, resulting in an antenna suitable for adverse conditions.

GPS-533

The GPS-533 is a high performance L1/L2 antenna with a built-in choke ring to substantially reduce the effects of multipath, making it ideal for use in a DGPS base station or other demanding applications. The antenna features an integrated protective radome to withstand harsh environments and meets DO-160D standards.

GPS-532 and GPS-532-C

NovAtel's GPS-532 is an aircraft-certified L1/L2 antenna for airborne and other high dynamic applications. Designed to the ARINC 743A standard, the GPS-532 weighs less than 200 grams and includes a four hole mounting system for secure installation. The GPS-532-C includes an FAA airworthiness certificate.

GPS-702L

The GPS-702L offers a single antenna solution for GPS L1 and L2 frequencies, as well as the L-band frequencies used by the OmniSTAR and Canada-Wide Differential GPS (CDGPS) correction services. This Pinwheel™ antenna features improved RTK performance with superior multipath rejection for high accuracy, real-time performance in any positioning mode. In addition, the GPS-702L is compliant with the European Union's directive for the Restriction of Hazardous Substances (RoHS), thus eliminating the need for future hardware changes.



Precise thinking

L1/L2 Antennas

Receiver Compatibility

All antennas listed on this page are designed for use with NovAtel's OEM4-based receivers or other equivalent high-precision GPS receivers.

GPS-702

For more specifications on the GPS-702, see the GPS-700 Series product sheet.

3 dB Pass Band

L1	1575 -15/+30 MHz (typical)
L2	1228 -15/+30 MHz (typical)

Out-of-Band Rejection ($f_c = L1, L2$)

$f_c - 30/+50$ MHz	30 dBc (typical)
$f_c - 40/+80$ MHz	50 dBc (typical)

LNA Gain

27 dB (typical)

Gain at Zenith (90°)

L1	+5 dBic (minimum)
L2	+2 dBic (minimum)

Noise Figure

≤ 2.0 dB (typical)

GPS-702L

For more specifications on the GPS-702L, see the GPS-702L product sheet.

3 dB Pass Band

L1	1575 ± 20 MHz (typical)
L2	1228 ± 20 MHz (typical)
L-band	1543 ± 20 MHz (typical)

Out-of-Band Rejection

L1, L-band ($f_c = 1555$ MHz)	
$f_c ± 75$ MHz	30 dBc (typical)
$f_c ± 100$ MHz	50 dBc (typical)
L2 ($f_c = 1227$ MHz)	
$f_c + 50$ MHz	25 dBc (typical)
$f_c - 50$ MHz	30 dBc (typical)
$f_c ± 100$ MHz	50 dBc (typical)
LNA Gain	27 dB (typical)

Gain at Zenith (90°)

L1	+5.0 dBic (minimum)
L2	+1.5 dBic (minimum)
L-band	+5.0 dBic (minimum)

Noise Figure

2.5 dB (typical)

GPS-533

Performance

3 dB Pass Band

L1	1575 ± 13 MHz (typical)
L2	1227 ± 13 MHz (typical)

Out-of-Band Rejection ($f_c = L1, L2$)

$f_c ± 50$ MHz	40 dBc (typical)
----------------	------------------

LNA Gain

L1	31 ± 2 dB (typical)
L2	33 ± 2 dB (typical)

Gain at Zenith (90°)

L1	+7.7 dBic (minimum)
L2	+4.7 dBic (minimum)

Gain Roll-Off (from Zenith to Horizon)

L1	15 dB
L2	18 dB

Noise Figure

≤ 3.0 dB (typical)

VSWR

≤ 1.5 : 1

Physical & Electrical

Size	
Diameter	308 mm
Height	223 mm

Weight

4.1 kg

Power

Input Voltage	+2.5 to +24 VDC
Power Consumption	1 W (typical)

Operating Temperature

-55°C to +85°C

Regulatory

FCC Class B, CE

GPS-532 / GPS-532-C

Performance

3 dB Pass Band

L1	1575 ± 12 MHz (typical)
L2	1227 ± 12 MHz (typical)

Out-of-Band Rejection ($f_c = L1, L2$)

$f_c ± 50$ MHz	40 dBc (typical)
----------------	------------------

LNA Gain

L1	31 ± 2 dB (typical)
L2	33 ± 2 dB (typical)

Gain at Zenith (90°)

L1	+4.7 dBic (minimum)
L2	+3.3 dBic (minimum)

Gain Roll-Off (from Zenith to Horizon)

L1	6.5 dB
L2	7.1 dB

Noise Figure

≤ 3.0 dB (typical)

VSWR

≤ 1.5 : 1

Physical & Electrical

Size	
19 x 76 x 119 mm (Conforms to ARINC 743A)	
Weight	
198 g	

Power

Input Voltage	+2.5 to +24 VDC
Power Consumption	1 W (typical)

Operating Temperature


-55°C to +85°C

Regulatory

FCC Class B, CE

GPS-533 and GPS-532 Elevation Gain Patterns

The plots to the right represent the typical right-hand polarized normalized radiation pattern for the L1 and L2 frequencies. The plots on the left are for the GPS-533 antenna and the plots on the right are for the GPS-532 antenna.

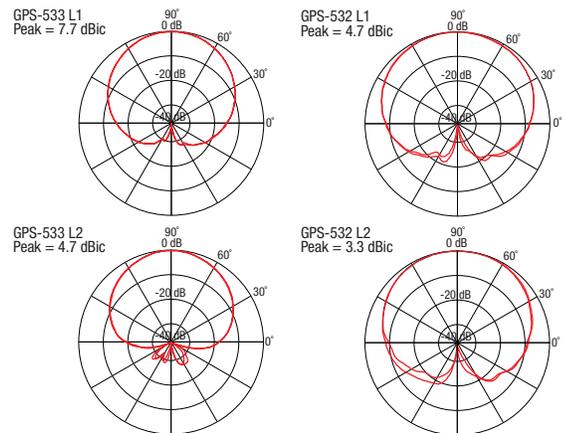

Version 2A - Specifications subject to change without notice. © 2006 NovAtel Inc. All rights reserved. Printed in Canada. D05466

Precise thinking